

PRODUCT DATASHEET

PL FLEX 600 S 30W 840 U19 PS

PANEL FLEX 600 UGR<19 PS | Square recessed panel luminaire with power select feature and low glare, for 600 x 600 mm ceiling systems



Areas of application

- Suitable for recessed ceiling systems with grid size of 600 x 600 mm
- Direct replacement for recessed luminaires with fluorescent lamps
- Offices, conference rooms
- Reception areas, foyers, corridors, elevators

Product benefits

- Highly versatile due to selectable power steps (Power Select - PS) on the driver and up to 4860 lm
- Energy savings thanks to high system efficacy: up to 169 lm/W
- Good glare reduction ($UGR \leq 19$)
- High color consistency with SDCM 3
- External driver for extended flexibility and easy installation
- Low flicker light thanks to special electronic control gear
- Tool-free electrical connection due to push button connector
- Through-wiring possible with included connector box
- Decentral emergency lighting possible with separately available LEDVANCE Emergency Conversion Box
- Extended services such as energy monitoring and remote maintenance possible with DALI versions
- 7 years guarantee

Product features

- Lifetime (L80/B10): 100,000 h (at 25 °C), (L90/B10): 50,000 h (at 25 °C)



- Suitable for central battery emergency installations acc. to EN 60598-2-22
- 5-pole terminal block, cable cross section up to 5 x 2.5 mm²
- Extruded aluminum frame, metal housing
- Polystyrene diffuser
- Luminaire versions with IoT-ready DALI-2 driver available


TECHNICAL DATA

Electrical data


Nominal wattage	30 W / 25 W / 21 W / 17 W
Nominal voltage	220...240 V
Mains frequency	50...60 Hz
Nominal current	140.000 mA
Inrush current	11.1 A
Inrush current time T_{h50}	600 μ s
Max. number of luminaires per miniature circuit breaker B16	12
Max. number of luminaires per miniature circuit breaker C10	13
Max. number of luminaires per miniature circuit breaker C16	21
Power factor λ	> 0.90
Total harmonic distortion	< 15 %
Protection class	II
Operating mode	External LED driver

Photometrical data


Luminous flux	4860 lm / 4130 lm / 3510 lm / 2880 lm
Luminous efficacy	162 lm/W / 165 lm/W / 167 lm/W / 169 lm/W
Color temperature	4000 K
Light color (designation)	Cool White
Color rendering index Ra	> 80
Standard deviation of color matching	≤ 3 sdc _{cm}
Low flicker	Yes
Flickering metric (Pst LM)	<1
Stroboscope effect metric (SVM)	<0.4
Photobiological safety group acc. to EN62778	RG0
Beam angle	90 °
UGR	< 19




PL FLEX 600 S 17W 4000K U19
2880lm




PL FLEX 600 S 21W 4000K U19
3510lm




PL FLEX 600 S 25W 4000K U19
4130lm




PL FLEX 600 S 30W 4000K U19
4860lm




PL FLEX 600 S 3W 4000K U19
400lm EM BOX




PL FLEX 600 S 17W 4000K U19
2880lm




PL FLEX 600 S 21W 4000K U19
3510lm



PL FLEX 600 S 25W 4000K U19
4130lm




PL FLEX 600 S 30W 4000K U19
4860lm



PL FLEX 600 S 3W 4000K U19
400lm EM BOX

Dimensions & Weight

Length	595.00 mm
Width	595.00 mm
Height	32.00 mm
Product weight	1600.00 g

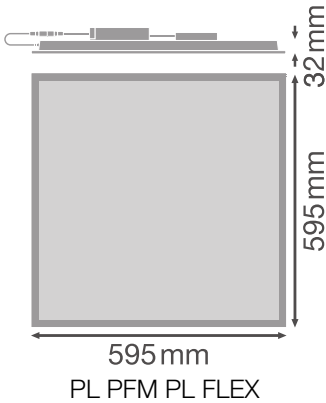

Materials & Colors

Product color	White
Housing color	White
Body material	Aluminum
Cover material	Polystyrene (PS)
Glow Wire Test according to IEC 60695-2-12	650 °C
Mercury content	0.0 mg

Application & Mounting

Ambient temperature range	-10...+50 °C
Temperature range at storage	-20...+80 °C
Type of connection	Screwless terminal, 5-Pole (L, N, PE, DA+, DA-)
Type of protection	IP40/IP20
Protection class IK (shock resistance)	IK02
Dimmable	No
Mounting type	Recessed/Suspended/Surface
Mounting location	Ceiling
Application environment	Indoor
Mounting length	595.00 mm

Mounting width	595.00 mm
Mounting depth	50 mm
Adjustable	No
With light source	Yes

Lifespan

Lifespan L70/B50 at 25 °C	100000 h ¹⁾
Lifespan L80/B10 at 25 °C	100000 h ¹⁾
Lifespan L80/B50 at 25 °C	100000 h
Lifespan L90/B10 at 25 °C	50000 h
Number of switching cycles	100000

¹⁾ t[h]: L70 / B50 @ 25 °C (Ta), t[h]: L80 / B10 @ 25 °C (Ta), t[h]: L90 / B10 @ 25 °C (Ta)

Control gear

Output current	700 mA
ECG - Output ripple current	< 5 %
ECG - Length	125 mm
ECG - Width	60 mm
ECG - Height	30 mm
Recommended control gear	DR DS-P-30/220-240/700 PL FLEX 600

Certificates & Standards

Standards	CE / CB / ENEC / UKCA / EAC / EPD / EL
Luminaire with limited surface temperature, "D sign"	No
Ball shot safe	No
Replaceable light source (EPREL)	By the end consumer

Additional product data

Added function	MULTI SELECT
----------------	--------------

Accessories Optional

Product image	Product name	EAN
	DR DS-P- 30/220-240/700 PL FLEX 600	4058075843684

Product image	Product name	EAN
	EM CONVERSION BOX	4058075237025
	PANEL Suspension Kit	4058075402928
	PANEL RECESSED MOUNT CLIPS VAL 4x	4058075409859
	PANEL 600 SURFACE MOUNT KIT H75	4058075472914
	PANEL 600 SURFACE MOUNT KIT H70 VAL	4058075402843

EQUIPMENT / ACCESSORIES

- Accessories for several mounting options available
- Connector box with 5-pole terminal included
- Security rope for luminaire included
- Security brackets preinstalled
- External control gear included
- Suitable for use with separate Emergency Conversion Box
- Serviceable luminaire: Upgrades and replacements available

DOWNLOAD DATA

Documents and certificates	Document name
 User instruction / safety instructions	PANEL FLEX
 Legal information	LSI PANEL FLEX
 Legal information	Legal Insert PL FLEX

Documents and certificates		Document name
	Legal information	Informationstext 18 Abs 4 ElektroG
	Legal information	EM Insert PL FLEX
	Declarations of conformity	PL FLEX
	Declarations of conformity UKCA	PL FLEX
Photometric and lighting design files		Document name
	IES file (IES)	PL FLEX 600 S 30W 4000K U19 4860lm
	IES files (IES, additional)	PL FLEX 600 S 17W 4000K U19 2880lm
	IES files (IES, additional)	PL FLEX 600 S 21W 4000K U19 3510lm
	IES files (IES, additional)	PL FLEX 600 S 25W 4000K U19 4130lm
	IES files (IES, additional)	PL FLEX 600 S 3W 4000K U19 400lm EM BOX
	LDT file (Eulumdat)	PL FLEX 600 S 30W 4000K U19 4860lm
	LDT files (Eulumdat, additional)	PL FLEX 600 S 17W 4000K U19 2880lm
	LDT files (Eulumdat, additional)	PL FLEX 600 S 21W 4000K U19 3510lm
	LDT files (Eulumdat, additional)	PL FLEX 600 S 25W 4000K U19 4130lm
	LDT files (Eulumdat, additional)	PL FLEX 600 S 3W 4000K U19 400lm EM BOX
	ULD file (DIALux)	PL FLEX 600 S 30W 840 U19 PS
	ROLF file (RELUX)	PL FLEX 600 S 30W 840 U19 PS
	UGR file (UGR table)	PL FLEX 600 S 17W 4000K U19 2880lm


Photometric and lighting design files		Document name
	UGR file (UGR table)	PL FLEX 600 S 21W 4000K U19 3510lm
	UGR file (UGR table)	PL FLEX 600 S 25W 4000K U19 4130lm
	UGR file (UGR table)	PL FLEX 600 S 30W 4000K U19 4860lm
	UGR file (UGR table)	PL FLEX 600 S 3W 4000K U19 400lm EM BOX
	Light distribution curve type cone	PL FLEX 600 S 17W 4000K U19 2880lm
	Light distribution curve type cone	PL FLEX 600 S 21W 4000K U19 3510lm
	Light distribution curve type cone	PL FLEX 600 S 25W 4000K U19 4130lm
	Light distribution curve type cone	PL FLEX 600 S 30W 4000K U19 4860lm
	Light distribution curve type cone	PL FLEX 600 S 3W 4000K U19 400lm EM BOX
	Light distribution curve type polar	PL FLEX 600 S 17W 4000K U19 2880lm
	Light distribution curve type polar	PL FLEX 600 S 21W 4000K U19 3510lm
	Light distribution curve type polar	PL FLEX 600 S 25W 4000K U19 4130lm
	Light distribution curve type polar	PL FLEX 600 S 30W 4000K U19 4860lm
	Light distribution curve type polar	PL FLEX 600 S 3W 4000K U19 400lm EM BOX
CAD/BIM files		Document name
	BIM Revit 3D	PL FLEX
	CAD STEP 3D	PL FLEX 600
Tender texts		Document name
	Tender documents	PANEL FLEX 600 UGR19 PS 30W 840 U19 PS-EN

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4099854276507	Folding box 1	35 mm x 685 mm x 600 mm	2055.00 g	14.39 dm ³
4099854276514	Shipping box 4	705 mm x 160 mm x 625 mm	9301.00 g	70.50 dm ³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products.

	DR DS-8-30/220-340/700 300W • 210V • 210W • 170V DR DS-8-30/220-340/700 300W • 210V • 220W • 170V																																																																																	
PANEL, PLEXI Ø60 • 600	ORDER	<table> <tr> <th>W 1000 M 1000 (CM)</th><th>W 1000 M 1000 (CM)</th><th>W 1000 M 1000 (CM)</th><th>W 1000 M 1000 (CM)</th></tr> <tr><td>15</td><td>220</td><td>4800</td><td>160</td></tr> <tr><td>25</td><td>400</td><td>4150</td><td>160</td></tr> <tr><td>35</td><td>600</td><td>3910</td><td>160</td></tr> <tr><td>45</td><td>800</td><td>3670</td><td>160</td></tr> <tr><td>55</td><td>1000</td><td>3430</td><td>160</td></tr> <tr><td>65</td><td>1200</td><td>3190</td><td>160</td></tr> <tr><td>75</td><td>1400</td><td>2950</td><td>160</td></tr> <tr><td>85</td><td>1600</td><td>2710</td><td>160</td></tr> <tr><td>95</td><td>1800</td><td>2470</td><td>160</td></tr> <tr><td>105</td><td>2000</td><td>2230</td><td>160</td></tr> <tr><td>115</td><td>2200</td><td>1990</td><td>160</td></tr> <tr><td>125</td><td>2400</td><td>1750</td><td>160</td></tr> <tr><td>135</td><td>2600</td><td>1510</td><td>160</td></tr> <tr><td>145</td><td>2800</td><td>1270</td><td>160</td></tr> <tr><td>155</td><td>3000</td><td>1030</td><td>160</td></tr> <tr><td>165</td><td>3200</td><td>790</td><td>160</td></tr> <tr><td>175</td><td>3400</td><td>550</td><td>160</td></tr> <tr><td>185</td><td>3600</td><td>310</td><td>160</td></tr> <tr><td>195</td><td>3800</td><td>70</td><td>160</td></tr> </table>	W 1000 M 1000 (CM)	W 1000 M 1000 (CM)	W 1000 M 1000 (CM)	W 1000 M 1000 (CM)	15	220	4800	160	25	400	4150	160	35	600	3910	160	45	800	3670	160	55	1000	3430	160	65	1200	3190	160	75	1400	2950	160	85	1600	2710	160	95	1800	2470	160	105	2000	2230	160	115	2200	1990	160	125	2400	1750	160	135	2600	1510	160	145	2800	1270	160	155	3000	1030	160	165	3200	790	160	175	3400	550	160	185	3600	310	160	195	3800	70	160
W 1000 M 1000 (CM)	W 1000 M 1000 (CM)	W 1000 M 1000 (CM)	W 1000 M 1000 (CM)																																																																															
15	220	4800	160																																																																															
25	400	4150	160																																																																															
35	600	3910	160																																																																															
45	800	3670	160																																																																															
55	1000	3430	160																																																																															
65	1200	3190	160																																																																															
75	1400	2950	160																																																																															
85	1600	2710	160																																																																															
95	1800	2470	160																																																																															
105	2000	2230	160																																																																															
115	2200	1990	160																																																																															
125	2400	1750	160																																																																															
135	2600	1510	160																																																																															
145	2800	1270	160																																																																															
155	3000	1030	160																																																																															
165	3200	790	160																																																																															
175	3400	550	160																																																																															
185	3600	310	160																																																																															
195	3800	70	160																																																																															
PL PLEXI Ø80 5000 4100 PPS L 4000 • 170V • 220V • 170V	DR DR-PLEXI-Ø80-5000-4100-1100 PPS L 4000 • 170V • 220V • 170V																																																																																	
PL PLEXI Ø80 5000 4100 PPS L 4000 • 170V • 220V • 170V																																																																																		
PL PLEXI Ø80 5000 4100 PPS L 4000 • 170V • 220V • 170V																																																																																		
PL PLEXI Ø80 5000 4100 PPS L 4000 • 170V • 220V • 170V																																																																																		
PL PLEXI Ø80 5000 4100 PPS L 4000 • 170V • 220V • 170V																																																																																		
PL PLEXI Ø80 5000 4100 PPS L 4000 • 170V • 220V • 170V																																																																																		
PL PLEXI Ø80 5000 4100 PPS L 4000 • 170V • 220V • 170V																																																																																		
PL PLEXI Ø80 5000 4100 PPS L 4000 • 170V • 220V • 170V																																																																																		
PL PLEXI Ø80 5000 4100 PPS L 4000 • 170V • 220V • 170V																																																																																		
PL PLEXI Ø80 5000 4100 PPS L 4000 • 170V • 220V • 170V																																																																																		
PL PLEXI Ø80 5000 4100 PPS L 4000 • 170V • 220V • 170V																																																																																		
PL PLEXI Ø80 5000 4100 PPS L 4000 • 170V • 220V • 170V																																																																																		
PL PLEXI Ø80 5000 4100 PPS L 4000 • 170V • 220V • 170V																																																																																		
PL PLEXI Ø80 5000 4100 PPS L 4000 • 170V • 220V • 170V																																																																																		
PL PLEXI Ø80 5000 4100 PPS L 4000 • 170V • 220V • 170V																																																																																		
PL PLEXI Ø80 5000 4100 PPS L 4000 • 170V • 220V • 170V																																																																																		
PL PLEXI Ø80 5000 4100 PPS L 4000 • 170V • 220V • 170V																																																																																		
PL PLEXI Ø80 5000 4100 PPS L 4000 • 170V • 220V • 170V																																																																																		
PL PLEXI Ø80 5000 4100 PPS L 4000 • 170V • 220V • 170V																																																																																		
PL PLEXI Ø80 5000 4100 PPS L 4000 • 170V • 220V • 170V																																																																																		
PL PLEXI Ø80 5000 4100 PPS L 4000 • 170V • 220V • 170V																																																																																		



– For Guarantee see www.ledvance.com/guarantee

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.