



PRODUCT DATASHEET

PL FLEX 600 S 30W 830 U19 PS

PANEL FLEX 600 UGR<19 PS | Square recessed panel luminaire with power select feature and low glare, for 600 x 600 mm ceiling systems

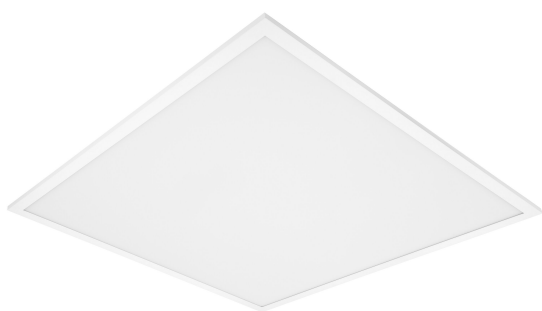

Areas of application

- Suitable for recessed ceiling systems with grid size of 600 x 600 mm
- Direct replacement for recessed luminaires with fluorescent lamps
- Offices, conference rooms
- Reception areas, foyers, corridors, elevators

Product benefits

- Highly versatile due to selectable power steps (Power Select - PS) on the driver and up to 4860 lm
- Energy savings thanks to high system efficacy: up to 169 lm/W
- Good glare reduction ($UGR \leq 19$)
- High color consistency with SDCM 3
- External driver for extended flexibility and easy installation
- Low flicker light thanks to special electronic control gear
- Tool-free electrical connection due to push button connector
- Through-wiring possible with included connector box
- Decentral emergency lighting possible with separately available LEDVANCE Emergency Conversion Box
- Extended services such as energy monitoring and remote maintenance possible with DALI versions
- 7 years guarantee

Product features

- Lifetime (L80/B10): 100,000 h (at 25 °C), (L90/B10): 50,000 h (at 25 °C)



- Suitable for central battery emergency installations acc. to EN 60598-2-22
- 5-pole terminal block, cable cross section up to 5 x 2.5 mm²
- Extruded aluminum frame, metal housing
- Polystyrene diffuser
- Luminaire versions with IoT-ready DALI-2 driver available


TECHNICAL DATA

Electrical data


Nominal wattage	30 W / 25 W / 21 W / 17 W
Nominal voltage	220...240 V
Mains frequency	50...60 Hz
Nominal current	140.000 mA
Inrush current	11.1 A
Inrush current time T_{h50}	600 μ s
Max. number of luminaires per miniature circuit breaker B16	12
Max. number of luminaires per miniature circuit breaker C10	13
Max. number of luminaires per miniature circuit breaker C16	21
Power factor λ	> 0.90
Total harmonic distortion	< 15 %
Protection class	II
Operating mode	External LED driver

Photometrical data


Luminous flux	4800 lm / 4050 lm / 3450 lm / 2830 lm
Luminous efficacy	160 lm/W / 162 lm/W / 164 lm/W / 166 lm/W
Color temperature	3000 K
Light color (designation)	Warm White
Color rendering index Ra	> 80
Standard deviation of color matching	≤ 3 sdc _{cm}
Low flicker	Yes
Flickering metric (Pst LM)	<1
Stroboscope effect metric (SVM)	<0.4
Photobiological safety group acc. to EN62778	RG0
Beam angle	90 °
UGR	< 19

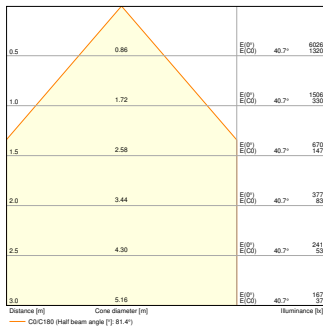


PL FLEX 600 S 17W 3000K U19
2830lm




PL FLEX 600 S 21W 3000K U19
3450lm




PL FLEX 600 S 25W 3000K U19
4050lm




PL FLEX 600 S 30W 3000K U19
4800lm




PL FLEX 600 S 3W 3000K U19
400lm EM BOX




PL FLEX 600 S 17W 3000K U19
2830lm




PL FLEX 600 S 21W 3000K U19
3450lm



PL FLEX 600 S 25W 3000K U19
4050lm




PL FLEX 600 S 30W 3000K U19
4800lm



PL FLEX 600 S 3W 3000K U19
400lm EM BOX

Dimensions & Weight

Length	595.00 mm
Width	595.00 mm
Height	32.00 mm
Product weight	1600.00 g

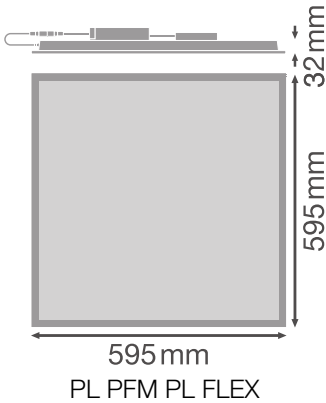

Materials & Colors

Product color	White
Housing color	White
Body material	Aluminum
Cover material	Polystyrene (PS)
Glow Wire Test according to IEC 60695-2-12	650 °C
Mercury content	0.0 mg

Application & Mounting

Ambient temperature range	-10...+50 °C
Temperature range at storage	-20...+80 °C
Type of connection	Screwless terminal, 5-Pole (L, N, PE, DA+, DA-)
Type of protection	IP40/IP20
Protection class IK (shock resistance)	IK02
Dimmable	No
Mounting type	Recessed/Suspended/Surface
Mounting location	Ceiling
Application environment	Indoor
Mounting length	595.00 mm

Mounting width	595.00 mm
Mounting depth	50 mm
Adjustable	No
With light source	Yes

Lifespan

Lifespan L70/B50 at 25 °C	100000 h ¹⁾
Lifespan L80/B10 at 25 °C	100000 h ¹⁾
Lifespan L80/B50 at 25 °C	100000 h
Lifespan L90/B10 at 25 °C	50000 h
Number of switching cycles	100000

¹⁾ t[h]: L70 / B50 @ 25 °C (Ta), t[h]: L80 / B10 @ 25 °C (Ta), t[h]: L90 / B10 @ 25 °C (Ta)

Control gear

Output current	700 mA
ECG - Output ripple current	< 5 %
ECG - Length	125 mm
ECG - Width	60 mm
ECG - Height	30 mm
Recommended control gear	DR DS-P-30/220-240/700 PL FLEX 600

Certificates & Standards

Standards	CE / CB / ENEC / UKCA / EAC / EPD / EL
Luminaire with limited surface temperature, "D sign"	No
Ball shot safe	No
Replaceable light source (EPREL)	By the end consumer

Additional product data

Added function	MULTI SELECT
----------------	--------------

Accessories Optional

Product image	Product name	EAN
	DR DS-P- 30/220-240/700 PL FLEX 600	4058075843684

Product image	Product name	EAN
	EM CONVERSION BOX	4058075237025
	PANEL Suspension Kit	4058075402928
	PANEL RECESSED MOUNT CLIPS VAL 4x	4058075409859
	PANEL 600 SURFACE MOUNT KIT H75	4058075472914
	PANEL 600 SURFACE MOUNT KIT H70 VAL	4058075402843

EQUIPMENT / ACCESSORIES

- Accessories for several mounting options available
- Connector box with 5-pole terminal included
- Security rope for luminaire included
- Security brackets preinstalled
- External control gear included
- Suitable for use with separate Emergency Conversion Box
- Serviceable luminaire: Upgrades and replacements available

DOWNLOAD DATA

Documents and certificates		Document name
	User instruction / safety instructions	PANEL FLEX
	Legal information	LSI PANEL FLEX
	Legal information	Legal Insert PL FLEX

Documents and certificates		Document name
	Legal information	Informationstext 18 Abs 4 ElektroG
	Legal information	EM Insert PL FLEX
	Declarations of conformity	PL FLEX
	Declarations of conformity UKCA	PL FLEX
Photometric and lighting design files		Document name
	IES file (IES)	PL FLEX 600 S 30W 3000K U19 4800lm
	IES files (IES, additional)	PL FLEX 600 S 17W 3000K U19 2830lm
	IES files (IES, additional)	PL FLEX 600 S 21W 3000K U19 3450lm
	IES files (IES, additional)	PL FLEX 600 S 25W 3000K U19 4050lm
	IES files (IES, additional)	PL FLEX 600 S 3W 3000K U19 400lm EM BOX
	LDT file (Eulumdat)	PL FLEX 600 S 30W 3000K U19 4800lm
	LDT files (Eulumdat, additional)	PL FLEX 600 S 17W 3000K U19 2830lm
	LDT files (Eulumdat, additional)	PL FLEX 600 S 21W 3000K U19 3450lm
	LDT files (Eulumdat, additional)	PL FLEX 600 S 25W 3000K U19 4050lm
	LDT files (Eulumdat, additional)	PL FLEX 600 S 3W 3000K U19 400lm EM BOX
	ULD file (DIALux)	PL FLEX 600 S 30W 830 U19 PS
	ROLF file (RELUX)	PL FLEX 600 S 30W 830 U19 PS
	UGR file (UGR table)	PL FLEX 600 S 17W 3000K U19 2830lm

Photometric and lighting design files		Document name
	UGR file (UGR table)	PL FLEX 600 S 21W 3000K U19 3450lm
	UGR file (UGR table)	PL FLEX 600 S 25W 3000K U19 4050lm
	UGR file (UGR table)	PL FLEX 600 S 30W 3000K U19 4800lm
	UGR file (UGR table)	PL FLEX 600 S 3W 3000K U19 400lm EM BOX
	Light distribution curve type cone	PL FLEX 600 S 17W 3000K U19 2830lm
	Light distribution curve type cone	PL FLEX 600 S 21W 3000K U19 3450lm
	Light distribution curve type cone	PL FLEX 600 S 25W 3000K U19 4050lm
	Light distribution curve type cone	PL FLEX 600 S 30W 3000K U19 4800lm
	Light distribution curve type cone	PL FLEX 600 S 3W 3000K U19 400lm EM BOX
	Light distribution curve type polar	PL FLEX 600 S 17W 3000K U19 2830lm
	Light distribution curve type polar	PL FLEX 600 S 21W 3000K U19 3450lm
	Light distribution curve type polar	PL FLEX 600 S 25W 3000K U19 4050lm
	Light distribution curve type polar	PL FLEX 600 S 30W 3000K U19 4800lm
	Light distribution curve type polar	PL FLEX 600 S 3W 3000K U19 400lm EM BOX
CAD/BIM files		Document name
	BIM Revit 3D	PL FLEX
	CAD STEP 3D	PL FLEX 600
Tender texts		Document name
	Tender documents	PANEL FLEX 600 UGR19 PS 30W 830 U19 PS-EN


LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4099854276521	Folding box 1	35 mm x 685 mm x 600 mm	2055.00 g	14.39 dm ³
4099854276538	Shipping box 4	705 mm x 160 mm x 625 mm	9301.00 g	70.50 dm ³


The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products.

When placing an order, for the quantity please enter single or multiples of a shipping unit.

ADDITIONAL CATALOG INFORMATION



MODEL, FLEX 600 / 830*	DR DS-P-30/220-240/750 PL FLEX 600 30W 220V 21V 17V	DR DS-P-30/220-240/700 PL FLEX 600 30W 220V 21V 17V	DR DS-P-30/220-240/750 PL FLEX 830 30W 220V 21V 17V
PL FLEX 600 S 30W 830 PS	30	750	1500
PL FLEX 600 S 30W 830 PS	25	600	1125
PL FLEX 600 S 30W 830 PS	20	600	1125
PL FLEX 600 S 30W 830 PS	17	410	780
PL FLEX 600 S 30W 830 PS	15	750	1500
PL FLEX 600 S 30W 830 PS	13	600	1125
PL FLEX 600 S 30W 830 PS	11	600	1125
PL FLEX 600 S 30W 830 PS	10	600	1125
PL FLEX 600 S 30W 830 PS	9	600	1125
PL FLEX 600 S 30W 830 PS	8	600	1125
PL FLEX 600 S 30W 830 PS	7	600	1125
PL FLEX 600 S 30W 830 PS	6	600	1125
PL FLEX 600 S 30W 830 PS	5	600	1125
PL FLEX 600 S 30W 830 PS	4	600	1125
PL FLEX 600 S 30W 830 PS	3	600	1125
PL FLEX 600 S 30W 830 PS	2	600	1125
PL FLEX 600 S 30W 830 PS	1	600	1125



References / Links

– For Guarantee see www.ledvance.com/guarantee

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.