

PRODUCT DATASHEET

DP FLEX TH 1500 P 42W ML 865 IP66

DAMP PROOF FLEX THROUGHWIRING | Flexible damp-proof luminaires with through-wiring and Multi Lumen function



Areas of application

- Industrial and storage facilities
- Workshops, assembly lines
- Passages, underpasses
- Parking garages
- Underground parking



Product benefits

- Uniform light distribution
- Easy upgradeability of light source and driver (EVERLOOP design)
- Enables participation in funding programs to replace light source and driver
- Easy access to electrical terminal thanks to end caps with twist and lock mechanism
- Easy installation as mounting brackets can be positioned freely on the luminaire
- Tool-free electrical connection due to push button connector
- Energy savings of up to 66 % (compared to luminaires that use fluorescent lamps)
- Low flicker ≤ 5 %

Product features

- High luminous efficacy: up to 165 lm/W
- Lifetime (L80/B50): up to 100,000 h (at 25 °C)
- Housing and diffuser material: polycarbonate (PC)
- Multi Lumen function: power steps selectable



- Through-wiring 3x1.5mm² already installed
- Beam angle: 120°
- Protection rating: IP65
- Impact resistance: IK08

TECHNICAL DATA

Electrical data


Nominal wattage	42 W / 23 W
Nominal voltage	220...240 V
Mains frequency	0/50/60 Hz
Nominal current	187/104 mA
Inrush current	20 A
Inrush current time T_{h50}	212 μ s
Max. number of luminaires per miniature circuit breaker B16	26
Max. number of luminaires per miniature circuit breaker C10	28
Max. number of luminaires per miniature circuit breaker C16	42
Power factor λ	≥ 0.90
Total harmonic distortion	$\leq 23 \%$
Protection class	II
Operating mode	Integrated LED driver

Photometrical data

Luminous flux	6900 lm / 3700 lm
Luminous efficacy	164 lm/W / 161 lm/W
Color temperature	6500 K
Light color (designation)	Cool Daylight
Color rendering index Ra	> 80
Standard deviation of color matching	≤ 5 sdc _m
Low flicker	Yes
Flickering metric (Pst LM)	≤ 1
Stroboscope effect metric (SVM)	< 0.4
Photobiological safety group acc. to EN62778	RG0
Beam angle	120 °



DP FLEX TH 1500 P 42W ML 865 IP66

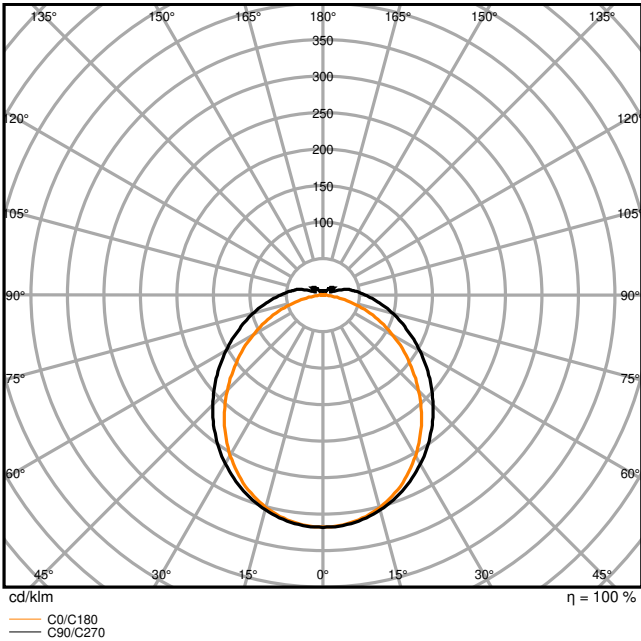


DP FLEX TH 1500 P 42W ML 865 IP66

Adjustable attributes

Nominal wattage	Color temperature	Luminous flux	Luminous efficacy
42 W	6500 K	6900 lm	164 lm/W
23 W	6500 K	3700 lm	161 lm/W

Dimensions & Weight

Length	1590.00 mm
Width	88.00 mm
Height	73.00 mm
Product weight	1450.00 g



DP FLEX TH 1500 P 42W ML

Materials & Colors

Product color	Gray
Housing color	Gray
Body material	Polycarbonate (PC)
Cover material	Polycarbonate (PC)
Light emitting surface material	Polycarbonate (PC)
Glow Wire Test according to IEC 60695-2-12	850 °C
Mercury content	0.0 mg

Application & Mounting

Ambient temperature range	-30...+50 °C
Temperature range at storage	-40...+80 °C
Type of connection	Screwless terminal, 3-Pole (N, E, L)
Type of protection	IP66
Protection class IK (shock resistance)	IK08
Dimmable	No
Mounting type	Suspended/Surface
Mounting location	Ceiling
Application environment	Indoor
With light source	Yes

Lifespan

Lifespan L70/B50 at 25 °C	100000 h ¹⁾
Lifespan L80/B10 at 25 °C	90000 h ¹⁾
Lifespan L80/B50 at 25 °C	100000 h

Lifespan L90/B10 at 25 °C	83000 h
Number of switching cycles	100000

1) t[h]: L70 / B50 @ 25 °C (Ta), t[h]: L80 / B10 @ 25 °C (Ta), t[h]: L90 / B10 @ 25 °C (Ta)

Control gear

Output current	275/150 mA
ECG - Output ripple current	5 %

Certificates & Standards

Standards	CE / CB / ENEC / TÜV SÜD / UKCA / EAC
Luminaire with limited surface temperature, "D sign"	Yes
Ball shot safe	No
Replaceable light source (EPREL)	Only by an expert

Additional product data

Product remark	Available from March 2025 / When used in very cold applications as in cold storage, a special membrane might be required to ensure lifetime
Added function	EVERLOOP / MULTI SELECT

EQUIPMENT / ACCESSORIES

- Stainless steel clamps with safety screws included
- Mounting accessories included (suspension kit, theft protection kit)
- EVERLOOP luminaire: upgrades and replacements available

Safety advice

- All electrical connections must be made by a qualified person.
- Caution, risk of electric shock.

DOWNLOAD DATA

Documents and certificates		Document name
	User instruction / safety instructions	DP FLEX TH
	Legal information	Safety Insert G11201420
	Legal information	Informationstext 18 Abs 4 ElektroG



Documents and certificates		Document name
	Legal information	LSI DP FLEX TH IP66
	Declarations of conformity	DP FLEX TH
	Declarations of conformity UKCA	DP FLEX TH
	Certificates	DAMP PROOF FLEX TH
Photometric and lighting design files		Document name
	IES file (IES)	DP FLEX TH 1500 P 42W ML 865 IP66
	LDT file (Eulumdat)	DP FLEX TH 1500 P 42W ML 865 IP66
	ULD file (DIALux)	DP FLEX TH 1500 P 42W ML 865 IP66
	ROLF file (RELUX)	DP FLEX TH 1500 P 42W ML 865 IP66
	UGR file (UGR table)	DP FLEX TH 1500 P 42W ML 865 IP66
	Light distribution curve type cone	DP FLEX TH 1500 P 42W ML 865 IP66
	Light distribution curve type polar	DP FLEX TH 1500 P 42W ML 865 IP66
CAD/BIM files		Document name
	BIM Revit 3D	Damp Proof Flex
	CAD STEP 3D	DP FLEX TH 1500



LOGISTICAL DATA



Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4099854440687	Folding box 1	1,328 mm x 95 mm x 78 mm	1682.00 g	9.84 dm³
4099854440694	Shipping box 6	1,650 mm x 248 mm x 215 mm	11660.00 g	87.98 dm³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

ADDITIONAL CATALOG INFORMATION










Model	Power	Beam angle	Beam diameter	Beam length	Beam width	Beam height	Beam depth	Beam weight	Beam length	Beam width	Beam height	Beam depth	Beam weight
DP FLEX TH 1500 P 30W ML 865 IP66	30W	15°	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm
DP FLEX TH 1500 P 42W ML 865 IP66	42W	15°	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm
DP FLEX TH 1500 P 60W ML 865 IP66	60W	15°	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm
DP FLEX TH 1500 P 80W ML 865 IP66	80W	15°	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm
DP FLEX TH 1500 P 100W ML 865 IP66	100W	15°	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm
DP FLEX TH 1500 P 120W ML 865 IP66	120W	15°	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm
DP FLEX TH 1500 P 150W ML 865 IP66	150W	15°	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm
DP FLEX TH 1500 P 200W ML 865 IP66	200W	15°	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm
DP FLEX TH 1500 P 250W ML 865 IP66	250W	15°	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm
DP FLEX TH 1500 P 300W ML 865 IP66	300W	15°	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm
DP FLEX TH 1500 P 350W ML 865 IP66	350W	15°	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm
DP FLEX TH 1500 P 400W ML 865 IP66	400W	15°	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm
DP FLEX TH 1500 P 450W ML 865 IP66	450W	15°	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm
DP FLEX TH 1500 P 500W ML 865 IP66	500W	15°	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm
DP FLEX TH 1500 P 550W ML 865 IP66	550W	15°	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm
DP FLEX TH 1500 P 600W ML 865 IP66	600W	15°	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm
DP FLEX TH 1500 P 650W ML 865 IP66	650W	15°	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm
DP FLEX TH 1500 P 700W ML 865 IP66	700W	15°	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm
DP FLEX TH 1500 P 750W ML 865 IP66	750W	15°	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm
DP FLEX TH 1500 P 800W ML 865 IP66	800W	15°	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm
DP FLEX TH 1500 P 850W ML 865 IP66	850W	15°	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm
DP FLEX TH 1500 P 900W ML 865 IP66	900W	15°	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm
DP FLEX TH 1500 P 950W ML 865 IP66	950W	15°	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm
DP FLEX TH 1500 P 1000W ML 865 IP66	1000W	15°	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm



References / Links

– For Guarantee see www.ledvance.com/guarantee

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

May 04, 2025, 19:34:57
DP FLEX TH 1500 P 42W ML 865 IP66

© 2025, LEDVANCE GmbH. All rights reserved.
Page 8 of 8