

# PRODUCT DATASHEET

## DL ALU DN 200 35 W 3000 K IP44/IP20 WT

DOWNLIGHT ALU | Downlight luminaires with aluminum housing



### Areas of application

- Direct replacement for luminaires with compact fluorescent lamps
- General illumination
- Public areas
- Stairways
- Corridors
- Foyers
- Shops

### Product benefits

- High luminous efficacy
- Energy savings up to 60 % (compared to luminaires that use CFL lamps)
- Very homogenous light
- Functional design
- Easy installation with fast connection
- External driver for extended flexibility (compatible with selected DALI drivers)
- 5 years guarantee

### Product features

- Diameter of required ceiling cut-out: 150 mm or 200 mm (depending on version)
- Type of protection: IP44




---

**TECHNICAL DATA****Electrical data**


|                                                             |                     |
|-------------------------------------------------------------|---------------------|
| Nominal wattage                                             | 35.00 W             |
| Nominal voltage                                             | 220...240 V         |
| Mains frequency                                             | 50...60 Hz          |
| Nominal current                                             | 125 mA              |
| Inrush current                                              | 9 A                 |
| Max. number of luminaires per miniature circuit breaker B16 | 83                  |
| Max. number of luminaires per miniature circuit breaker C10 | 64                  |
| Max. number of luminaires per miniature circuit breaker C16 | 102                 |
| Power factor $\lambda$                                      | > 0.90              |
| Total harmonic distortion                                   | < 20 %              |
| Protection class                                            | II                  |
| Operating mode                                              | External LED driver |

**Photometrical data**

|                                              |                     |
|----------------------------------------------|---------------------|
| Luminous flux                                | 2975 lm             |
| Luminous efficacy                            | 85 lm/W             |
| Color temperature                            | 3000 K              |
| Light color (designation)                    | Warm White          |
| Color rendering index Ra                     | > 80                |
| Standard deviation of color matching         | ≤6 sdc <sub>m</sub> |
| Luminous intensity                           | -                   |
| Flickering metric (Pst LM)                   | -                   |
| Stroboscope effect metric (SVM)              | -                   |
| Photobiological safety group acc. to EN62778 | RG0                 |
| Photobiological safety group acc. to EN62471 | RG0                 |
| Beam angle                                   | 100 °               |

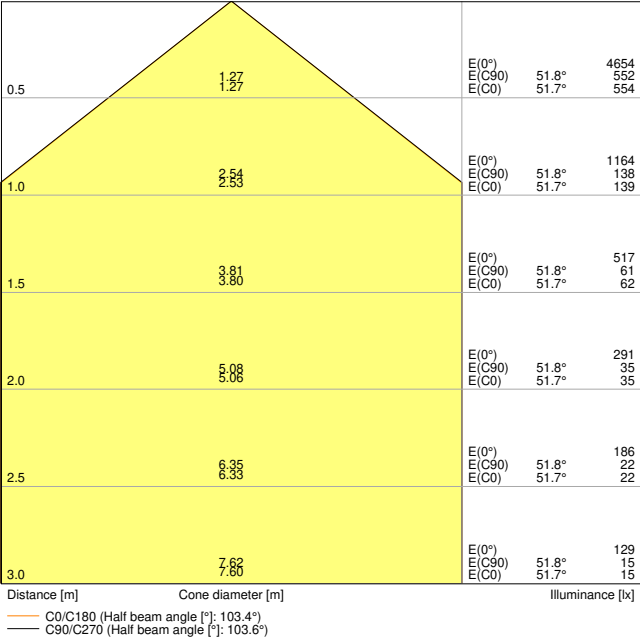


DL ALU DN200 35W 3000K WT IP44

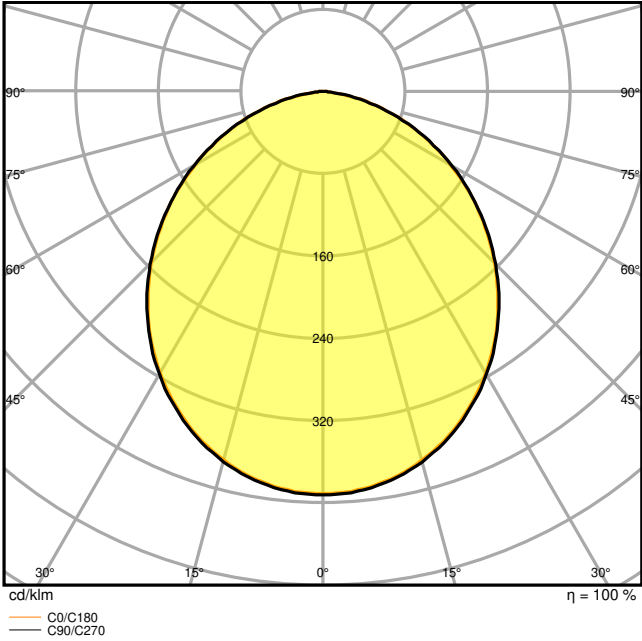

DL ALU 35W/3000K WT IP44

Dimensions & Weight

|                |           |
|----------------|-----------|
| Diameter       | 215.00 mm |
| Height         | 61.00 mm  |
| Product weight | 600.00 g  |

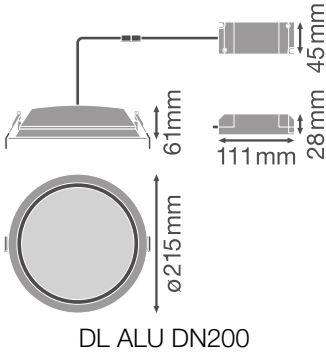

Materials & Colors

|               |       |
|---------------|-------|
| Product color | White |
| Housing color | White |

|                                            |                               |
|--------------------------------------------|-------------------------------|
| Body material                              | Aluminum                      |
| Cover material                             | Polymethylmethacrylate (PMMA) |
| Glow Wire Test according to IEC 60695-2-12 | 650 °C                        |

### Application & Mounting

|                                        |                              |
|----------------------------------------|------------------------------|
| Ambient temperature range              | -20...+45 °C                 |
| Temperature range at storage           | -20...+80 °C                 |
| Type of connection                     | Screw terminal, 2-Pole (L,N) |
| Type of protection                     | IP44/IP20                    |
| Protection class IK (shock resistance) | IK02                         |
| Dimmable                               | No                           |
| Mounting type                          | Recessed                     |
| Mounting location                      | Ceiling                      |
| Application environment                | Indoor                       |
| Mounting diameter                      | 200 mm                       |
| Mounting depth                         | 120 mm                       |
| With light source                      | Yes                          |

### Lifespan

|                            |                       |
|----------------------------|-----------------------|
| Lifespan L70/B50 at 25 °C  | 50000 h <sup>1)</sup> |
| Lifespan L80/B10 at 25 °C  | 45000 h <sup>1)</sup> |
| Lifespan L80/B50 at 25 °C  | 45000 h               |
| Lifespan L90/B10 at 25 °C  | 30000 h               |
| Number of switching cycles | 100000                |

<sup>1)</sup> t[h]: L70 / B50 @ 25 °C (Ta), t[h]: L80 / B10 @ 25 °C (Ta), t[h]: L90 / B10 @ 25 °C (Ta)

### Control gear

|                             |        |
|-----------------------------|--------|
| Output current              | 750 mA |
| ECG - Output ripple current | < 35 % |
| ECG - Length                | 138 mm |
| ECG - Width                 | 45 mm  |
| ECG - Height                | 28 mm  |

### Certificates & Standards

|                                                      |                          |
|------------------------------------------------------|--------------------------|
| Standards                                            | CE / CB / ENEC / TÜV SÜD |
| Luminaire with limited surface temperature, "D sign" | No                       |

|                                  |                 |
|----------------------------------|-----------------|
| Ball shot safe                   | No              |
| Replaceable light source (EPREL) | Not replaceable |

### Additional product data

|                       |              |
|-----------------------|--------------|
| Number of illuminants | Not relevant |
|-----------------------|--------------|

### Accessories Optional

| Product image                                                                     | Product name      | EAN           |
|-----------------------------------------------------------------------------------|-------------------|---------------|
|  | EM CONVERSION BOX | 4058075237025 |

### Safety advice

- All electrical connections must be made by a qualified person.
- Caution, risk of electric shock.
- The luminaires are not suitable for covering with thermally insulated material.

### DOWNLOAD DATA

|                                                                                    | Documents and certificates             | Document name                                   |
|------------------------------------------------------------------------------------|----------------------------------------|-------------------------------------------------|
|  | User instruction / safety instructions | UI Downlight ALU                                |
|  | On-Pack-Info                           | Legal Insert Downlight LED ALU+Comfort          |
|  | Legal information                      | LSI DL ALU                                      |
|  | Legal information                      | Informationstext 18 Abs 4 ElektroG              |
|  | Declarations of conformity             | CE-Certificate Downlight ALU TUV                |
|  | Declarations of conformity             | EU Declaration of Conformity DOWNLIGHT ALU LEDV |
|  | Declarations of conformity UKCA        | UKCA Declaration of Conformity DL ALU WT IP44   |


| Photometric and lighting design files                                               |                                     | Document name                                |
|-------------------------------------------------------------------------------------|-------------------------------------|----------------------------------------------|
|    | IES file (IES)                      | DL ALU DN200 35W 3000K WT IP44               |
|    | LDT file (Eulumdat)                 | DL ALU DN200 35W 3000K WT IP44               |
|    | ULD file (DIALux)                   | DOWNLIGHTALU20035W3000KIP44WT                |
|    | ROLF file (RELUX)                   | DL ALU DN200 35W-3000K                       |
|    | UGR file (UGR table)                | DL ALU DN200 35W 3000K WT IP44               |
|    | Light distribution curve type cone  | DL ALU DN200 35W 3000K WT IP44               |
|    | Light distribution curve type polar | DL ALU 35W3000K WT IP44                      |
| CAD/BIM files                                                                       |                                     | Document name                                |
|    | BIM Revit 3D                        | Downlight ALU                                |
|   | CAD STEP 3D                         | DL ALU 25W 35W                               |
| Tender texts                                                                        |                                     | Document name                                |
|  | Tender documents                    | DOWNLIGHT ALU 200 35 W 3000 K IP44IP20 WT-EN |

LOGISTICAL DATA

| Product code  | Packaging unit (Pieces/Unit) | Dimensions (length x width x height) | Gross weight | Volume    |
|---------------|------------------------------|--------------------------------------|--------------|-----------|
| 4058075091559 | Folding box<br>1             | 225 mm x 225 mm x 110 mm             | 775.00 g     | 5.57 dm³  |
| 4058075091566 | Shipping box<br>8            | 462 mm x 462 mm x 240 mm             | 6830.00 g    | 51.23 dm³ |

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

ADDITIONAL CATALOG INFORMATION



---

### References / Links

– For Guarantee see [www.ledvance.com/guarantee](http://www.ledvance.com/guarantee)

---

### DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.